

for a greener tomorrow

DESIGN

GUIDE



PASSENGER ELEVATORS

Ceiling Design Signal Fixtures Interior Hall Design Observation Cars Materials and Colors

Principle

Based on our policy, "Quality in Motion", we provide elevators and escalators that will satisfy our customers with high levels of comfort, efficiency, ecology and safety.

Comfort

Quality in Notion

Ecology

Safety

1

Mitsubishi Electric elevators, escalators and building management systems are always evolving, helping achieve our goal of being the No.1 brand in quality. In order to satisfy customers in all aspects of comfort, efficiency and safety while realizing a sustainable society, quality must be of the highest level in all products and business activities, while priority is place on consideration for the environment. As the times change, Mitsubishi Electric promises to utilize the collective strengths of its advanced and environmental technologies to offer its customers safe and reliable products while contributing to society.


Efficiency

We strive to be green in all of our business activities.

We take every action to reduce environmental burden during each process of our elevators' and escalators' lifecycle.



Contents

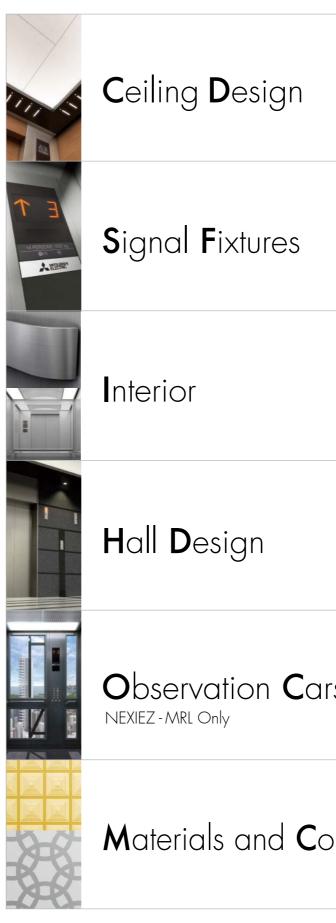

	3-14
	15-23
	24
	25-26
-S	27-28
olors	29-30




Ceiling Design



L400



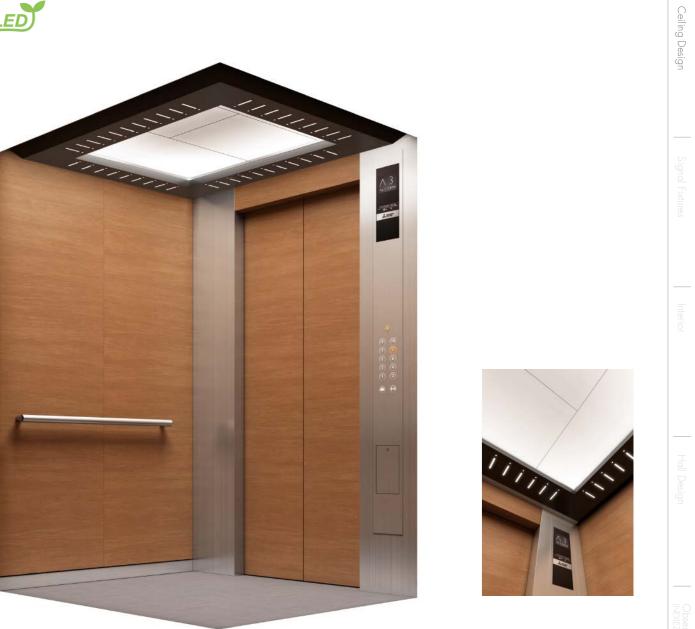

Car Design Example

Ceiling (L400)	Panel: Painted steel sheet [Y05 Lighting: Indirect lighting (LED
Walls	Pattern-printed steel sheet [CP
Transom panel	Pattern-printed steel sheet [CP
Doors	Pattern-printed steel sheet [CP
Front return panels	SUS-HL
Kickplate	SUS-HL
Flooring	PR803: Gray
Car operating panel —	CBV1-C730
Handrail —	YH-59S

Softly lit illuminated ceiling with a sparkling slitted frame

55: Dark gray] Ds) P121: Primary grain] P121: Primary grain] P121: Primary grain]

> Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of SUS-HL.



Contrast of light and shadows using sharp lines










Car Design Example

Ceiling (L410)	 Panel: Painted steel sheet [Y033: White] with slits Lighting: Slit lighting (LEDs)
Walls	
Transom panel ———	- SUS-M
Doors	- SUS-M
Front return panels —	- SUS-M
Kickplate	- SUS-HL
Flooring	PR812: Dim-gray
Car operating panel —	- CBV3-C730 (faceplate: SUS-M)
Handrail	- YH-59M



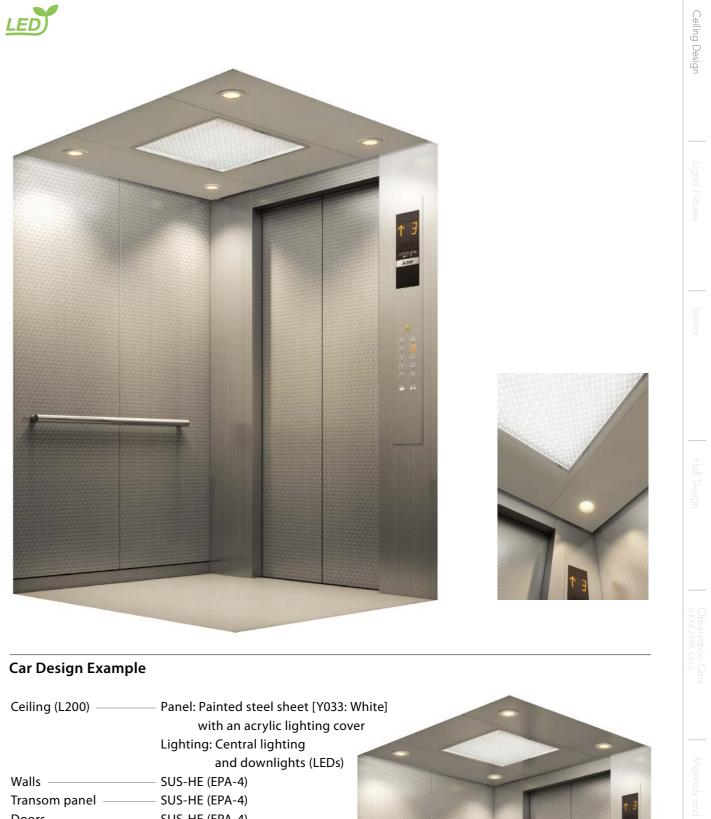

Ceiling (L200)	- Panel: Painted steel sheet [Y0 with an acrylic lighting
	Lighting: Central lighting
	and downlights (LE
Walls	– SUS-HE (EPA-4)
Transom panel ———	– SUS-HE (EPA-4)
Doors	– SUS-HE (EPA-4)
Front return panels —	– SUS-HL
Kickplate	– SUS-HL
Flooring	– PR810: Ocher
Car operating panel —	- CBV1-C760 🛛 🔹 💟 🔹
Handrail	- YH-59M

Note: Position of central lighting differs from images shown above when an emergency exit (the area shown in blue) is required.



Twinkling lights through chandelier-like lighting panel

Optional Ceiling Design L200S Panel: SUS-HL Others: Same as L200.

Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of SUS-HL, SUS-HE and SUS-M.



Sophisticated atmosphere created by downlights and shadows

Beautifully arched panel with shaded gradation








Car Design Example

Ceiling (L210) ———	Panel: Painted steel sheet [Y033: \	Nhit
	Lighting: Downlights (LEDs)	
Walls	Pattern-printed steel	
	sheet [CP111: Dark grain]	
Transom panel ———	Pattern-printed steel	
	sheet [CP111: Dark grain]	
Doors	Pattern-printed steel	
	sheet [CP111: Dark grain]	
Front return panels ——	SUS-HL	
Kickplate ———	SUS-HL	On
Flooring	PR812: Dim-gray	Op Pane
Car operating panel ——	CBV1-N730	Oth
Handrail	YH-59S	



ptional Ceiling Design L210S inel: SUS-HL thers: Same as L210.

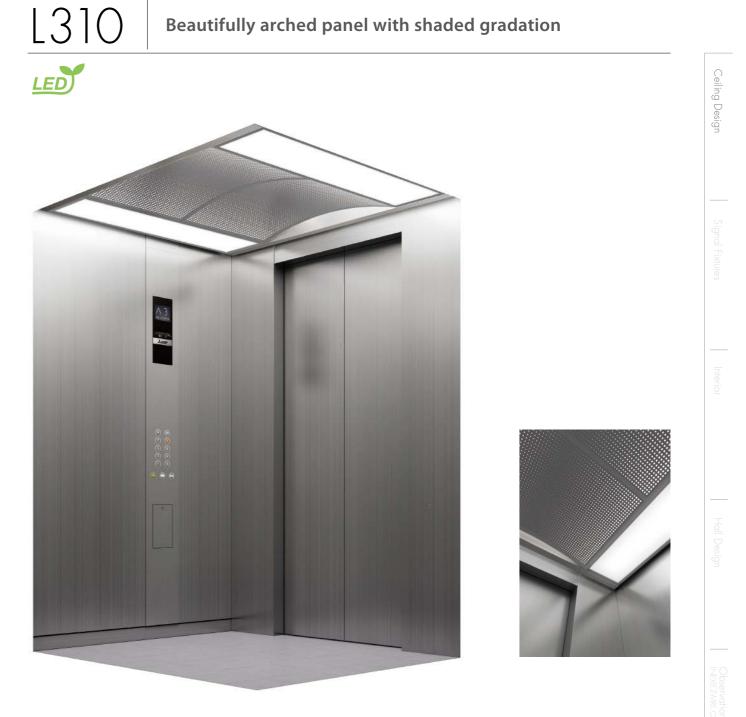

Car Design Example

Ceiling (L310)	Panels: [Center] Metal-like res
	[Sides] Milky white res
	Lighting: Full lighting (LEDs)
Walls	- SUS-HL
Transom panel	- SUS-HL
Doors	- SUS-HL
Front return panels —	- SUS-HL
Kickplate	- SUS-HL
Flooring	- PR803: Gray
Car operating panel —	- CBV1-N730

esin panel esin panels

Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of SUS-HL.

N300







Car Design Example

Ceiling (N300) ———	— Panel: Painted steel sheet [Y033: \	White]
	Lighting: Central indirect lighting	and downlights
Walls	 Pattern-printed steel 	
	sheet [CP23: Minimal stripe]	
Transom panel	— SUS-HL	
Doors	— SUS-HL	
Front return panels —	— SUS-HL	
Kickplate	— SUS-HL	
Flooring	— PR801: Cream beige	
Car operating panel —	— CBV1-N710	100
Handrail	— YH-59S	
		Ontional Ceiling



Optional Ceiling Design N300S Panel: SUS-HL Walls: SUS-HL Others: Same as N300.



Car Design Example

Ceiling (N120)	– Panels: [Center] Milky white re
	[Sides] Resin panels w
	Lighting: Central lighting and
Walls	– SUS-HE (EPA-3)
Transom panel	– SUS-HE (EPA-3)
Doors	– SUS-HE (EPA-3)
Front return panels —	– SUS-M
Kickplate	– SUS-HL
Flooring	– PR801: Cream beige
Car operating panel —	– CBV5-N710
Handrail	– YH-59M

Gorgeous ceiling with lustrous translucent panels fused using refined geometric patterns




resin panel with mirrored surface ad downlights

Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of SUS-HL, SUS-HE and SUS-M. Ceiling Design


N130 Light transmitted through exotic ceiling patterns




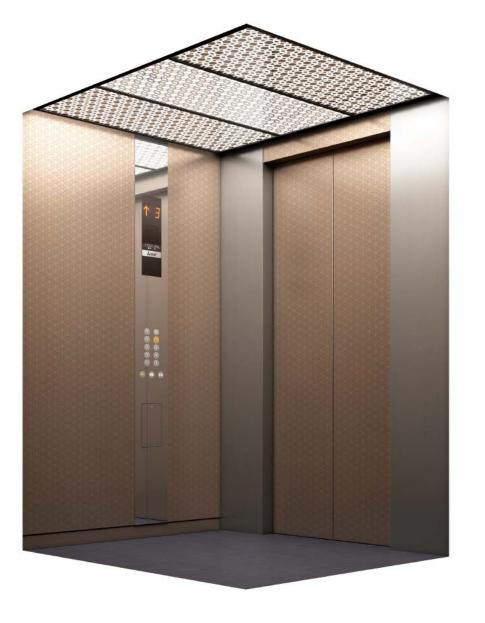

Car Design Example

Ceiling (N130) ————	Panel: Milky white resin panels Lighting: Full lighting
Walls	Colored (bronze) SUS-HE (EPA-2)
Transom panel	Colored (bronze) SUS-HE (EPA-2)
Doors	Colored (bronze) SUS-HE (EPA-2)
Front return panels ——	SUS-HL
Kickplate	Colored (bronze) SUS-HL
Flooring	PR812: Dim-gray
Car operating panel ——	CBV1-N710 (faceplate: SUS-M)



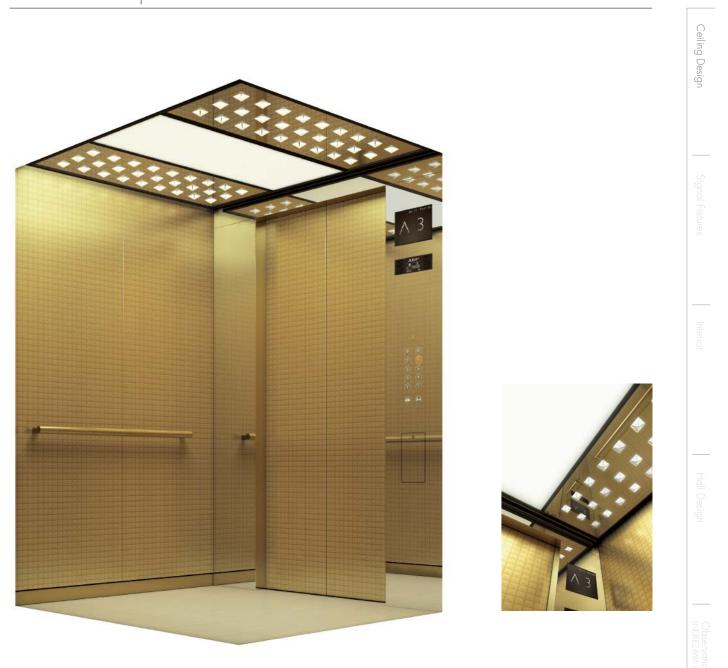

Car Design Example

Ceiling (N140)	 Panels: [Center] Milky white res
	[Sides] Resin panels wit
	Lighting: Full lighting
Walls	- Colored (gold) SUS-HE (EPA-1)
Transom panel	– SUS-M
Doors	– Colored (gold) SUS-HE (EPA-1)
Front return panels —	– SUS-M
Kickplate	 Colored (gold) SUS-HL
Flooring	PR810: Ocher
Car operating panel —	 CBV1-D740 (faceplate: SUS-M)
Handrail	- YH-59G

Stylish ceiling accented with crystal-like blocks

esin panel ith mirrored surface and acrylic blocks

Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of colored SUS-HL, colored SUS-HE and SUS-M.



Simple and easy to coordinate with various car designs



Note: Position of central lighting differs from images shown above when an emergency exit (the area shown in blue) is required.

Car Design Example-2

Ceiling (S00)	Same as Car Design Example-1
Walls	Painted steel sheet [Y004: Beige]
Transom panel ———	Painted steel sheet [Y004: Beige]
Doors	Painted steel sheet [Y004: Beige]
Front return panels —	SUS-HL
Kickplate ———	Aluminum
Flooring ———	PR803: Gray
Car operating panel —	CBV1-C760
Handrail ———	YH-59S



Car Design Example-1

Ceiling (S00)	Panel: Painted steel sheet [Y033: White] with a milky white resin lighting cover Lighting: Central lighting
Walls	SUS-HL
Transom panel ——	SUS-HL
Doors	SUS-HL
Front return panels $-$	SUS-HL
Kickplate	Aluminum
Flooring ———	PR803: Gray
Car operating panel $-$	CBV1-C760
Handrail	YH-59S





Car Design Example-3

Ceiling (S00)	– Same as Car Design Example-1
Walls	– Painted steel sheet [Y117: Lime green]
Transom panel ——	– Painted steel sheet [Y117: Lime green]
Doors	– Painted steel sheet [Y117: Lime green]
Front return panels –	– SUS-HL
Kickplate	– Aluminum
Flooring	– PR803: Gray
Car operating panel –	- CBV1-C760
Handrail	- YH-59S

Car Finish Application Table Please refer to pages 29 and 30 for materials and colors.

Materials/Finishes	Walls	Transom panel	Doors	Front return panels	Kickplate	Flooring	Sill
Stainless-steel, hairline-finish (SUS-HL)	Standard	Standard	Standard	Standard	Optional		
Pattern-printed steel sheet	Optional	Optional	Optional				
Painted steel sheet	Optional	Optional	Optional	Optional ^{*3}	Optional ^{*4}		
Stainless-steel, hairline-finish with etched pattern ^{*1} (SUS-HE)	Optional	Optional	Optional				
Colored stainless-steel, hairline-finish (colored SUS-HL)	Optional	Optional	Optional		Optional		
Colored stainless-steel, hairline-finish with etched pattern ^{*2} (colored SUS-HE)	Optional	Optional	Optional				
Stainless-steel, mirror-finish (SUS-M)	Optional	Optional	Optional	Optional			
Aluminum					Standard		
Glass windows [1300(H)×200(W)/1300(H)×300(W)]			Optional				
See-through doors			Optional				
Durable vinyl tiles (2mm thick)						Standard	
Aluminum checkered plate (3t)						Optional	
Rubber tile/carpet/marble/granite (supplied by customer)						Optional	
Extruded hard aluminum							Standard
Stainless-steel							Optional

Note: *1: Etching pattern EPA-1~6 only. *2: Etching pattern EPA-1~3 only. *3: Painted steel sheet may not be available for front return panel depending on the manufacturing factory, please consult our local agents for details. *4: Only available in dark gray.



Car Design Example-4

5	 Same as Car Design Example-1 Painted steel sheet [Y119: Carrot orange]
	– Painted steel sheet [Y119: Carrot orange]
Doors	 Painted steel sheet [Y119: Carrot orange]
Front return panels –	– SUS-HL
Kickplate	– Aluminum
Flooring	– PR803: Gray
Car operating panel –	- CBV1-C760
Handrail	– YH-59S

Ceiling Des




Signal Fixtures



14 PERSONS 1050 kg

8

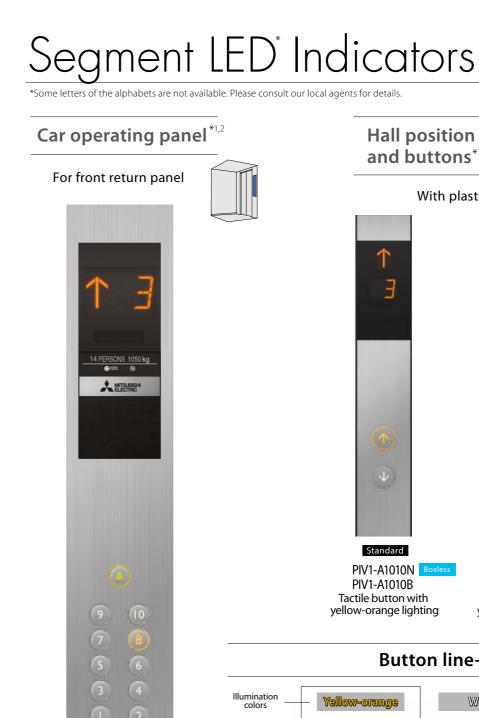

Standard CBV1-C760*3 (CBV1-C766)*3,4 Tactile button with yellow-orange lighting

Tactile or flat button (stainless-steel, non-directional hairline) is selectable from three types of illumination colors (yellow-orange, white or blue).

*1: Dot LED indicators are also available (optional). Please consult our local agents for details. *2: A faceplate with stainless-steel, mirror-finish is also available (optional). Please consult our local agents for details. *3: Maximum number of floors: 22 floors.

*4: The type in parentheses () shows an auxiliary car operating panel (optional). The design is slightly different from the above image. Please consult our local agents for further information such as installation location.

Tactile

Flat



Hall position indicators and buttons*1

With plastic case

PIV1-A1010N Boxless



Sign

nal Fixt

Standard PIV1-A1020N Boxless PIV1-A1020B

Tactile button with yellow-orange lighting


Button line-up



Segment LED^{*} Indicators

*Some letters of the alphabets are not available. Please consult our local agents for details.

Car operating panels*1,2,3



For front return	panel ———
or 4	
() () () () () () () () () () () () () (
C	
CBV■-C710 (CBV■-C716)*4	Swing type CBV■-D710 (CBV■-D716)*4





17

*1: The symbol 🔳 is replaced with a number representing the button type and illumination color. (e.g. CBV1, CBV2, etc.) *1. The symbol is replaced with a number representing the button type and indimination color. (e.g. CBV1, CBV2, etc.)
*2: Dot LED indicators are also available (optional). Please consult our local agents for details.
*3: Faceplates with stainless-steel, mirror-finish are also available (optional). Please consult our local agents for details.
*4: The types in parentheses () show an auxiliary car operating panels (optional). The design is slightly different from the above images.

Please consult our local agents for further information such as installation location

*5: The applicable button type is tactile buttons only.


*6: For single-car operation, these hall signal fixtures with tactile buttons conform to EN81-70.





LCD Indicators

Car operating panels^{*1,2}

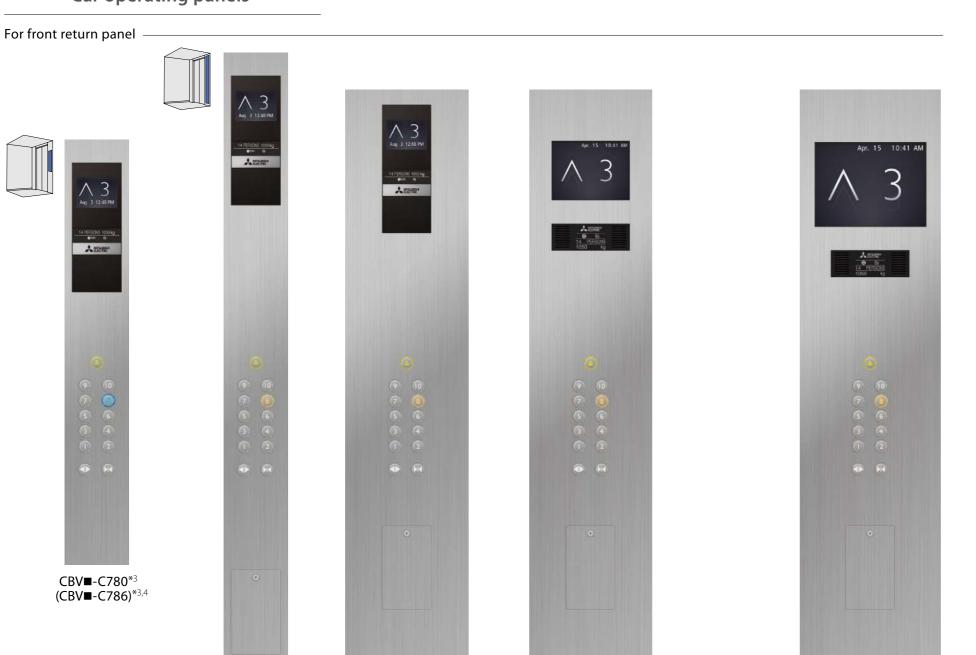

CBV∎-C730 (CBV■-C736)*4

Swing type (5.7-inch) CBV■-D730 (CBV■-D736)^{*4}

Swing type (10.4-inch) CBV -D740



Notes:

Notes: *1: The symbol ■ is replaced with a number representing the button type and illumination color. (e.g. CBV1, CBV2, etc.) Please refer to page 16 for button line-up. *2: Faceplates with stainless-steel, mirror-finish are also available (optional). Please consult our local agents for details. *3: Maximum number of floors: 22 floors.

*4: The types in parentheses () show an auxiliary car operating panels (optional). The design is slightly different from the above images. Please consult our local agents for further information such as installation location.

19 *5: The applicable button type is tactile buttons only.



LCD Indicators

Hall position indicators and buttons *1,2



LCD position indicator (for hall)



PIH-C117 (5.7-inch)

LCD information displays (for hall)



PIH-C216 (10.4-inch)



PIH-C226 (15-inch)

Notes

- *1: The symbol
 is replaced with a number representing the button type and illumination color. (e.g. PIV1, PIV2, etc.) Please refer to page 16 for button line-up.
- *2: Faceplates with stainless-steel, mirror-finish are also available (optional).
- Please consult our local agents for details. *3: For single-car operation, this hall signal fixture with tactile buttons conform to EN81-70. *4: The types in parentheses () show auxiliary car operating panels (optional).
- The design is slightly different from the above images. Please consult our local agents for further information such as installation location.
- *5: The symbol 🗌 is replaced with an illumination color number as shown under the car operating panel images.



NEXIEZ-MR, NexWay-S Only



21



(Stainless-steel matte)

Hall Signal Fixtures

	Hall la	nterns	
HLV-A215	HLV-A31S	HLV-E65 Ornament: Gold	HLV-E66 Ornament: Silver
H	HLV-E71	HLH-A31S	
HLV-A16S	HLH-A16S	Hal With plastic ca	Il buttons ^{*1} se
No-entry indica	tors for EN81-73	HBVE-A1010N B HBVE-A1010B	bxless HBV■-C710N ^{*2,3}
HBV■-C711N*1,2,3	Cross-section fixtures Boxless These hall signal fixt mounted on the wa having to cut into t the back box.	ures can be easily Il surface without	Wiring hole

Interior

Mirrors





YZ-52A Half-size

YZ-53A 2-mirror set

Handrails



YH-59S(SUS-HL)



YH-59G (SUS-M)

Notes:
*1: The symbol ■ is replaced with a number representing the button type and illumination color. (e.g. HBV1, HBV2, etc.) Please refer to page 16 for button line-up.
*2: A faceplate with stainless-steel, mirror finish is also available (optional). Please consult our local agents for details.
*3: These hall signal fixtures with tactile buttons are applicable to EN81-70 compliant elevators.



YZ-55SN Full height



YH-59M (SUS-M)



YH-57S(SUS-HL)



E-312 Splayed Jamb with Transom Panel E-212 Square Jamb with Transom Panel



Jamb ———	—— SUS-HL
Transom panel —	SUS-HL
Doors —	—— See-through doors
Hall lantern	—— HLV-A31S
Hall button	—— HBV1-C710N

E-302 Splayed Jamb E-202 Square Jamb



Jamb ———	SUS-HL
Doors —	Painted steel sheet (Y014: Red-violet)
Hall position indicator—	PIH-D417
Hall button	HBV1-C710N

Entrance Finish Application Table Please refer to pages 29 and 30 for materials and colors.

Materials/Finishes	Jamb	Transom panel	Doors	Sill
Stainless-steel, hairline-finish (SUS-HL)	Standard	Optional	Standard	
Painted steel sheet	Optional	Optional	Optional	
Stainless-steel, hairline-finish with etched pattern (SUS-HE)		Optional	Optional	
Stainless-steel, mirror-finish (SUS-M)			Optional	
Glass windows [1300(H)×200(W)/1300(H)×300(W)]			Optional	
See-through doors			Optional	
Extruded hard aluminum				Standard
Stainless-steel				Optional

E-312 Splayed Jamb with Transom Panel E-212 Square Jamb with Transom Panel



– SUS-HL
- SUS-HL
- SUS-HL
PID-D417
- HBV1-C710N





Jamb —	– SUS-HL
Doors	– SUS-HL
Hall position indicator	
and button	— PIV1-A1010N 🧕



Materials and Colors

Actual colors may differ slightly from those shown.



Natural light gives the car a spacious atmosphere





Ceiling — Lighting — Mullions (inte Mullions (exte

Windows —

Glass frames Transom panel



NY-30C

Both sides



Rear & both sides



NY-30D Rear & one side





	L310	Doors	SUS-HL with
	Full lighting (LEDs)		glass window
terior) –	SUS-HL	Front return panel —	SUS-HL
terior)-	Painted finish	Kickplate ———	SUS-HL
	(N5.5: gray)	Flooring	PR812: Dim-gray
	Transparent	Car operating panel —	CBV1-N710
	flat glass	Handrail	SUS-HL
5	Aluminum		(YH-55S)
nel —	SUS-HL		











NY-30E Rear & one side

Observation Cars (NEXIEZ-MRL Only)



Actual colors may differ slightly from those shown. Please refer to page 14 for the meaning of SUS-HL.

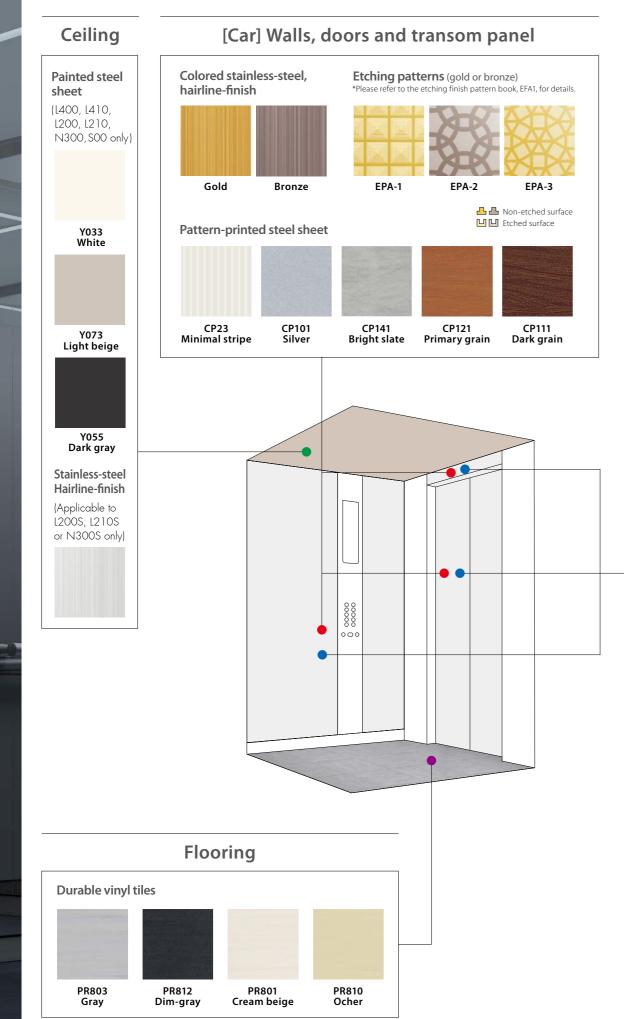

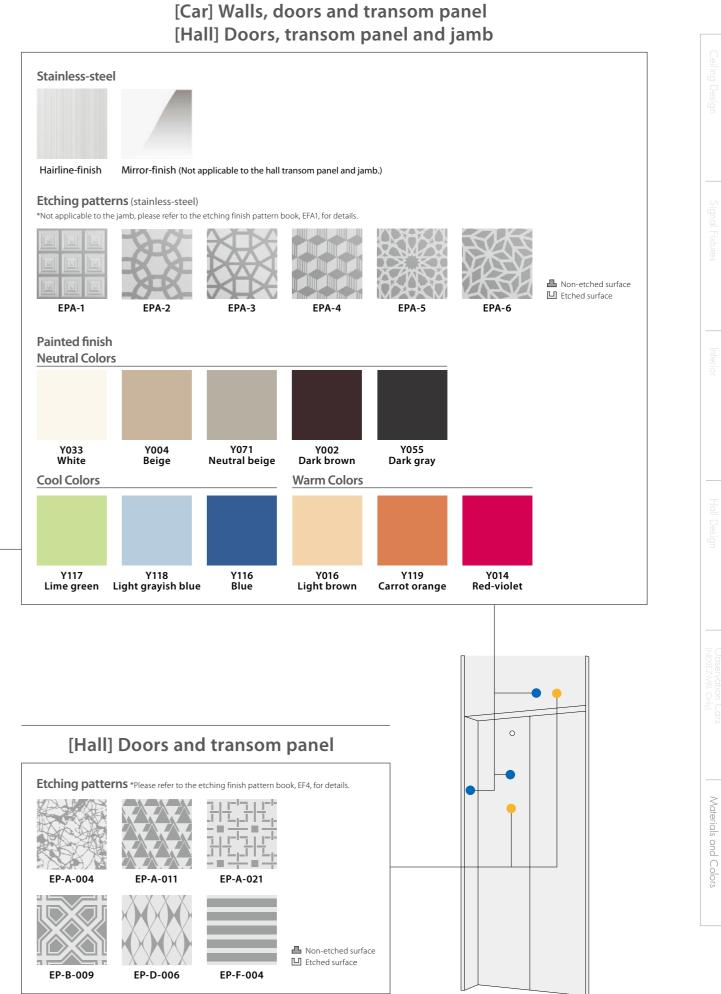



S

C



State-of-the-Art Factories... For the Environment. For Product Quality.

Mitsubishi Electric elevators and escalators are currently operating in approximately 90 countries around the globe. Built placing priority on safety, our elevators, escalators and building system products are renowned for their excellent efficiency, energy savings and comfort. The technologies and skills cultivated at the Inazawa Works in Japan and 12 global manufacturing factories are utilized in a worldwide network that provides sales, installation and maintenance in support of maintaining and improving product quality.

As a means of contributing to the realization of a sustainable society, we consciously consider the environment in business operations, proactively work to realize a low-carbon, recycling-based society, and promote the preservation of biodiversity.

ISO9001/14001 certification

Mitsubishi Electric Corporation Inazawa Works has acquired ISO 9001 certification from the International Organization for Standardization based on a review of quality management. The plant has also acquired environmental management system standard ISO 14001 certification.





Mitsubishi Elevator Asia Co., Ltd. has acquired ISO 9001 certification from the International Organization for Standardization based on a review of quality management. The plant has also acquired environmental management system standard ISO 14001 certification.





Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

MITSUBISHI ELECTRIC CORPORATION HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAI www.MitsubishiElectric.com/elevator

www.imisubisinelectric.com/elevator

A Safety Tips: Be sure to read the instruction manual fully before using this product.



Revised publication effective Sep. 2019. Superseding publication of C-CL1-3-C9116-I Dec. 2018. Specifications are subject to change without notice. ©2019 Mitsubishi Electric Corporation

0008